


QSB5G6

Emissions Compliance:
EU Stage IIIA at 50 Hz
EPA Tier 3 at 60 Hz

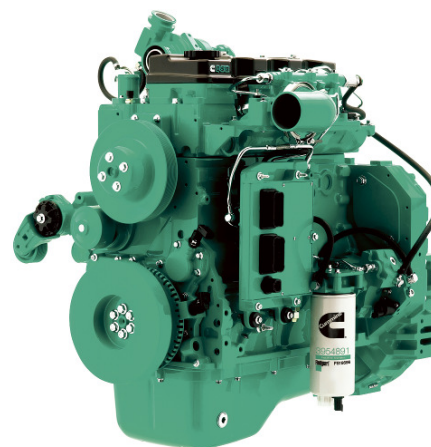

> Specification sheet

Our energy working for you.™



Description

The QSB5 incorporates the latest diesel engine technology, including a high pressure common rail fuel system for greater fuel efficiency, lower noise and reduced emissions.



This engine has been built to comply with CE certification.



This engine has been designed in facilities certified to ISO9001 and manufactured in facilities certified to ISO9001 or ISO9002.

Features

Full-Authority Electronic Controls - Optimize engine operation and deliver critical information for controlling costs, reducing maintenance and seamless integration with other components.

Holset Wastegated Turbo - Wastegated design optimizes transient response.

Low-Maintenance Fuel Filter Assembly - The fuel filter incorporates an integral water separator and water-in-fuel sensor; 500-hour filter life with easy top-load replacement using standard Fleetguard® filter

Service and Support - G-Drive products are backed by an uncompromising level of technical support and after sales service, delivered through a world class service network.

1500 rpm (50 Hz Ratings)

Gross Engine Output			Net Engine Output			Typical Generator Set Output					
Standby	Prime	Base	Standby	Prime	Base	Standby (ESP)		Prime (PRP)		Base (COP)	
kWm/BHP			kWm/BHP			kWe	kVA	kWe	kVA	kWe	kVA
144/193	128/171	78/105	136/214	121/162	71/95	120	150	109	136	66	83

1800 rpm (60 Hz Ratings)

Gross Engine Output			Net Engine Output			Typical Generator Set Output					
Standby	Prime	Base	Standby	Prime	Base	Standby (ESP)		Prime (PRP)		Base (COP)	
kWm/BHP			kWm/BHP			kWe	kVA	kWe	kVA	kWe	kVA
155/208	136/183	72/97	143/192	125/168	61/82	125	156	113	141	57	71

Our energy working for you.™

www.cumminsgdrive.com

©2010 | Cummins G-Drive Engines | Specifications Subject to Change Without Notice | Cummins is a registered trademark of Cummins Inc.
(08/10)



General Engine Data

Type	4-Cycle, in-line, 4-cylinder diesel
Bore mm	107 mm (4.21 in.)
Stroke mm	124 mm (4.88 in.)
Displacement Litre	4.5 litre (275 in.3)
Cylinder Block	Cast iron, 4 cylinder
Battery Charging Alternator	100 amps
Starting Voltage	12 volt, negative ground
Fuel System	Direct injection
Fuel Filter	Spin-on fuel filters with water separator
Lube Oil Filter Type(s)	Spin-on full flow filter
Lube Oil Capacity (l)	12.2
Flywheel Dimensions	SAE3

Coolpac Performance Data

Cooling System Design	Not available
Coolant Ratio	
Coolant Capacity (l)	
Limiting Ambient Temp. ** (°C)	
Fan Power	
Cooling System Air Flow (m³/s)**	
Air Cleaner Type	

** @ 13mm H₂O

Ratings Definitions

Emergency Standby Power (ESP):

Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.

Limited-Time Running Power (LTP):

Applicable for supplying power to a constant electrical load for limited hours. Limited-Time Running Power (LTP) is in accordance with ISO 8528.

Prime Power (PRP):

Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.

Base Load (Continuous) Power (COP):

Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) in accordance with ISO 8528, ISO 3046, AS 2789, DIN6271 and BS 5514.

Weight & Dimensions

Length	Width	Height	Weight (dry)
mm	mm	mm	kg
1353	855	1143	897

Fuel Consumption 1500 (50 Hz)

%	kWm	BHP	L/ph	US gal/ph
Standby Power				
100	144	193	36	9.4
Prime Power				
100	128	171	31	8.3
75	95	128	27	7.3
50	64	86	19	4.9
25	32	43	9	2.5
Continuous Power				
100	78	105	23	6

Fuel Consumption 1800 (60 Hz)

%	kWm	BHP	L/ph	US gal/ph
Standby Power				
100	155	208	39	10.3
Prime Power				
100	136	183	35	9.3
75	102	137	31	8.4
50	69	92	21	5.6
25	34	46	11	3
Continuous Power				
100	72	97	23	6

Cummins G-Drive Engines

Asia Pacific
10 Toh Guan Road
#07-01
TT International Tradepark
Singapore 608838
Phone 65 6417 2388
Fax 65 6417 2399

Europe, CIS, Middle East and Africa
Manston Park Columbus Ave
Manston Ramsgate
Kent CT12 5BF. UK
Phone 44 1843 255000
Fax 44 1843 255902

Latin America
Rua Jati, 310, Cumbica
Guarulhos, SP 07180-900
Brazil
Phone 55 11 2186 4552
Fax 55 11 2186 4729

Mexico
Cummins S. de R.L. de C.V.
Eje 122 No. 200 Zona Industrial
San Luis Potosi, S.L.P. 78090
Mexico
Phone 52 444 870 6700
Fax 52 444 870 6811

North America
1400 73rd Avenue N.E.
Minneapolis, MN 55432
USA
Phone 1 763 574 5000
USA Toll-free 1 877 769 7669
Fax 1 763 574 5298

Our energy working for you.™

www.cumminsgdrive.com

©2010 | Cummins G-Drive Engines | Specifications Subject to Change Without Notice | Cummins is a registered trademark of Cummins Inc. (08/10)

